

BARRY ISETT & ASSOCIATES, INC.

Consulting Engineers & Surveyors

100 W. Broad Street, Suite 200 Hazleton, PA 18201-1064

(Fax: 570.454.9979)

570.455.2999

Single Family Residential **Uncovered Decks and Porches**


How to Use this Guide

Provide three sets of plans and complete the following:

- 1. Complete this Building Guide by filling in the blanks on page two, and indicating which construction details will be used.
- 2. Provide 3 Plot Plans (site plan) showing dimensions of your project or addition, and indicating which construction details will be used.

3. Fill out a building permit application.

The majority of permit applications are processed with little delay. The submitted documents will help determine if the project is in compliance with building safety codes, zoning ordinances and other applicable laws.

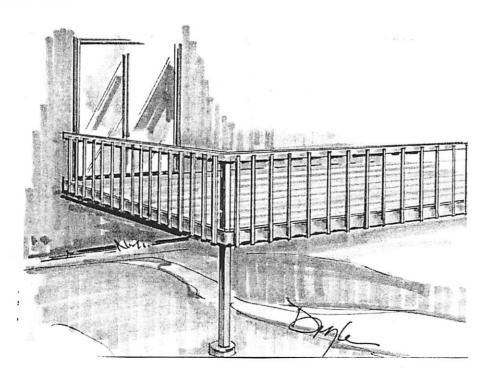


610.398.0904 (Fax: 610.481.9098)

www.barryisett.com


Single Family Residential Uncovered Decks and Porches Directions Address: 1. Fill in the blanks on pages 2 and 3 with dimensions and materials which will be used to build the structure. Please print legibly. 2. Indicate in the check box which detail from page 3 will be used. Size and Amount of Lags (example: Two 3/8"x 4 1/2" lags @ 16" O.C.) Type of decking **Deck Section** (example: 1 x 4 or 2 x 6 - Trex) Existing bldg. 36" high guard 2xwith balusters spaced apart spaced so that a (example: 2 x 10" spaced 24" apart) 4 Inch diameter sphere cannot Approved pass through flashing Beam splices to occur over required beam posts with 1 1/2" bearing (example: (2) 2 x 10 - see detail B) Attach decking with non corrosive fasteners 2xrim joist (example: 2 x 10 - see Alternate B1 & B2) ✓ Check one in. min. (see note) □ Detail B □ Alternate Detail B1 posts □ Alternate Detail B2 spaced Detail A apart (see page 3) (see page 3) (example: 4 x 4 posts spaced 8' apart) Conditions such as attachment to Span cantilevers or veneers may require ij Engineer's approval (example: 13' - 4") Type of siding (existing) Detail C (see page 3) Finished grade Note: Emergency escape windows are allowed to Inches Min. be installed under decks and porches provided the location of the deck allows the emergency escape window to be fully opened and provides a path not less than 36" in height to a yard or court. 6'8" required for walk out basements or patios. Note: A plot plan (plan view) showing the dimensions of your project or additions and its relationships to existing buildings or structures on the property must be included. In addition to project dimensions, your plot plan must also show other details such as post locations and spacing, joist and beam spans, and any other pertinent information not shown on the section drawing.

Single Family Residential Uncovered Decks and Porches


Detail A




Detail B




Alternate Detail B1



Alternate Detail B2

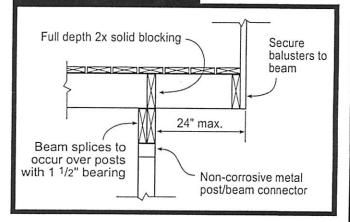


Detail C

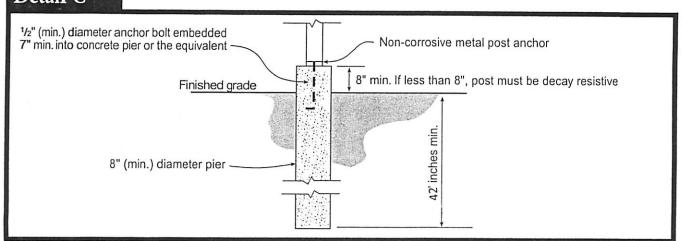

Single Family Residential Uncovered Decks and Porches


Stair & Handrail Specifications

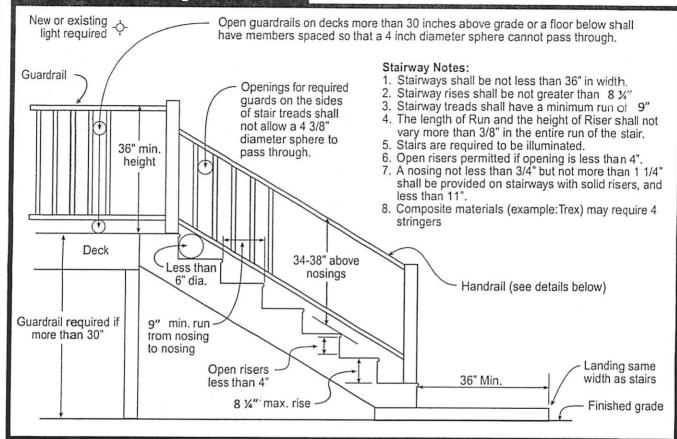

Handrail Notes:

- 1. Handrails shall be continuous on at least one side of stairs with 4 or more risers.
- 2. Top of the handrails shall be placed not less than 34 inches nor more than 38 inches above stair nosings.
- 3. The handgrip portion of handrails shall be not less than 1-1/4 inches nor more than 2 1/4 inches in cross section for non circular handrails.
- 4. Handrails shall be placed not less than 1-1/2 inches from any wall or other surface.
- 5. Handrails to be returned to wall, post or safety terminal (per 311.5.6.2 IRC)

Acceptable Handrail Details

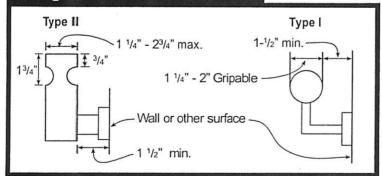

Unacceptable Handrails

